


FEEDALL Model 1650-1SC-36 Entrance Conveyor
FEEDALL Model 1650-1SC-60 Intermediate Conveyor
FEEDALL Model 1650-1SC-36 Exit Conveyor

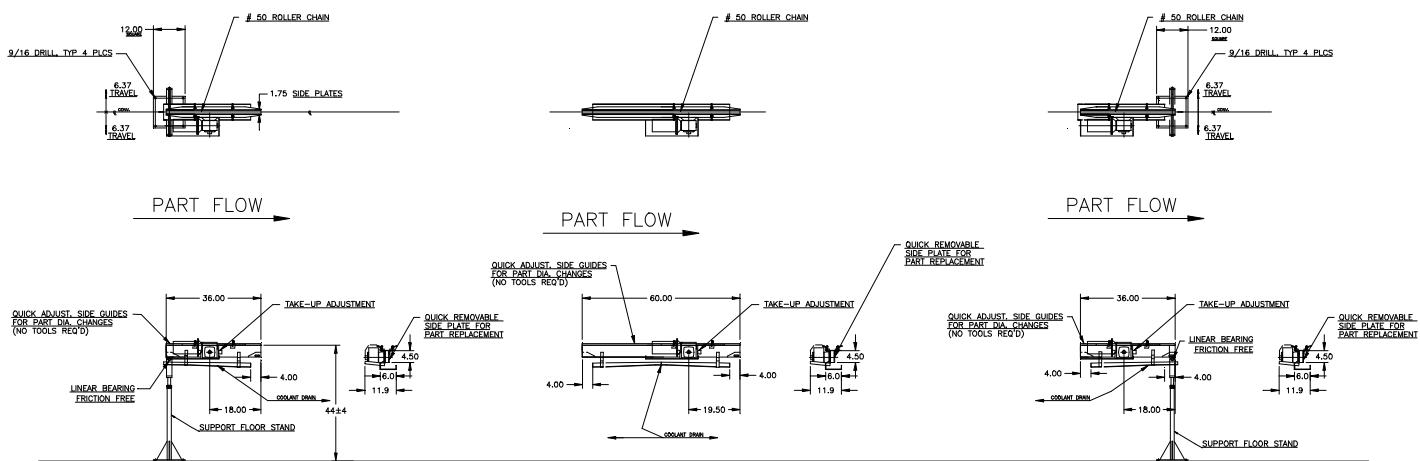

APPLICATION:	Convey Shock Absorber Shafts between two Induction Heat Treaters.
BELT WIDTH:	1" Wide Silent Chain
DRIVE:	1/4 HP/AC Motor w/Variable Frequency Controller
PARTS FED (SIZE):	Shock Absorber Shafts (0.492"-983"Ø x 7.42"-20.47" Lg.)
FEED RATE:	1-50 feet/minute
MACHINE FED:	Induction Hardener